

:






:

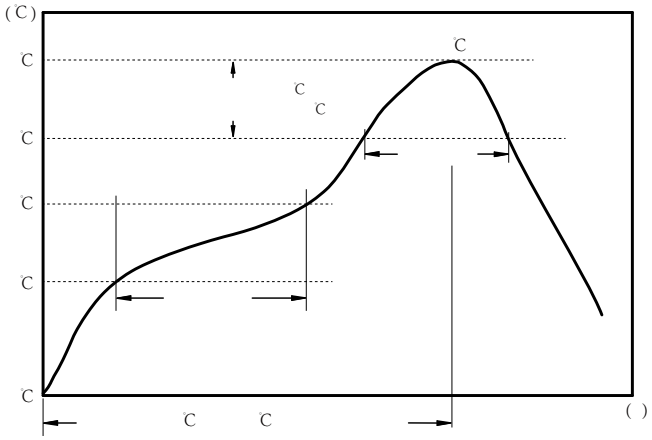



	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
ACMV3225	2.7 ± 0.1	3.9 ± 0.1	1.5 ± 0.1	4.0 ± 0.1	4.0 ± 0.1	12.0 ± 0.3	2.8 ± 0.1	1.75 ± 0.1	0.35 ± 0.1

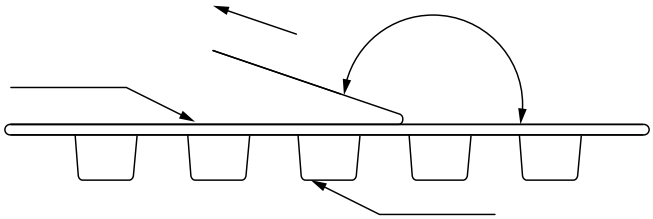

The peel force of top cover tape shall be between 0.1 to 1.3 N

:

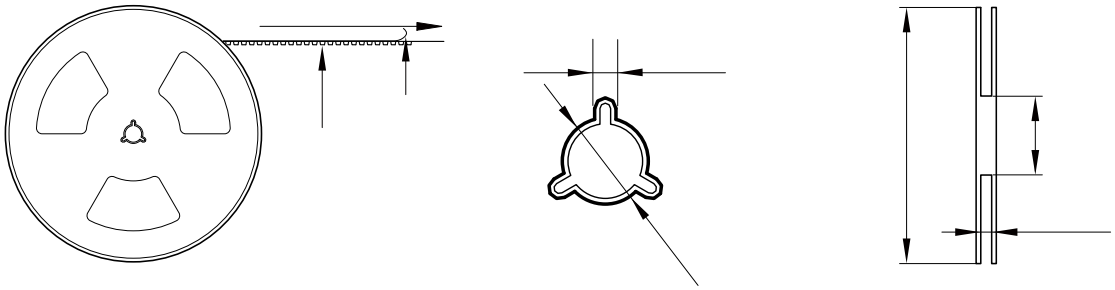

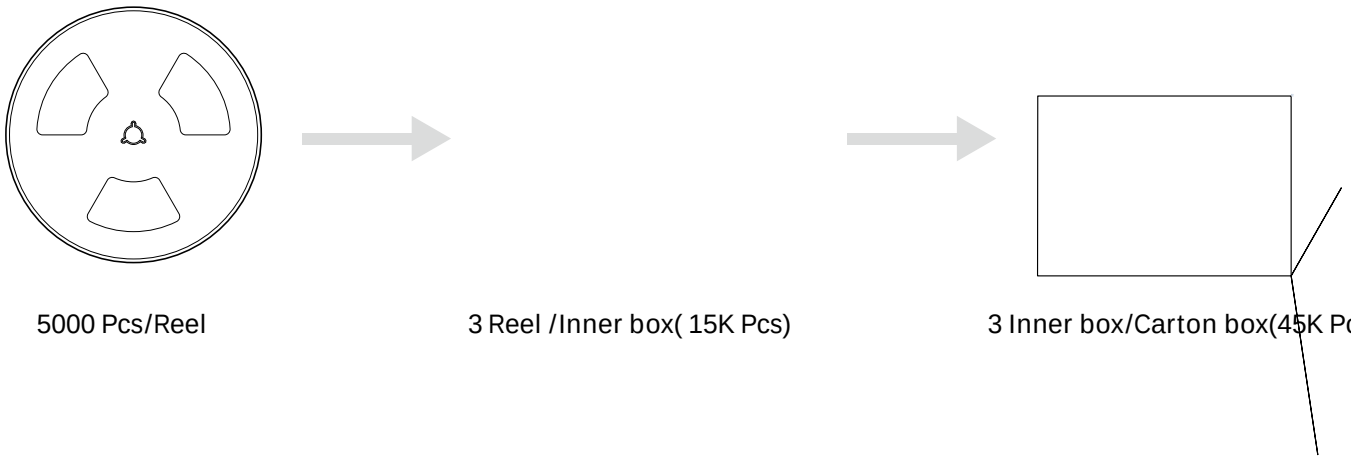

5000 Pcs/Reel

3 Reel /Inner box(15K Pcs)

3 Inner box/Carton box(45K Pcs)

:

- tions (temperature: -5 to 35°C, humidity: 75% RH Max).If the storage period elapses, the soldering of the
-
-
-

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient
-
-
-

-
-
-
-
-