


FBHA S Series

Chip Ferrite Bead High Current Type

Size 1206




FEATURES

-
- Compa
-
-
-
- Quan ty: 3000pcs


APPLICATION

- Power line filter for body controls, and car mul media etc.

Dimensions: [mm]

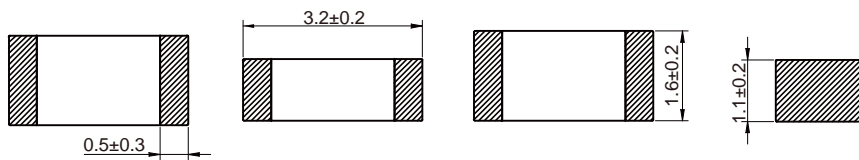

Land Pattern: [mm]








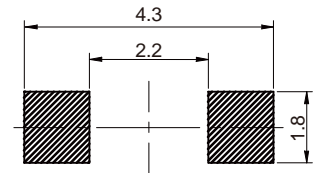


Electrical Properties:

| Part No | Impedance @ 100MHz | Tolerance | DC Resistance Max. | Temperature Rise Current Max. |
|---------|--------------------|-----------|--------------------|-------------------------------|
| | | 0% | | |
| | | 0% | | |
| | | 0% | | |
| | | 0% | | |
| | | 0% | | |
| | | 0% | | |
| | | 0% | | |
| | | 0% | | |

Temperature Rise Current: The actual value of DC current when the temperature rise is $\Delta T=40^{\circ}\text{C}$

Typical Electrical Characteristics:

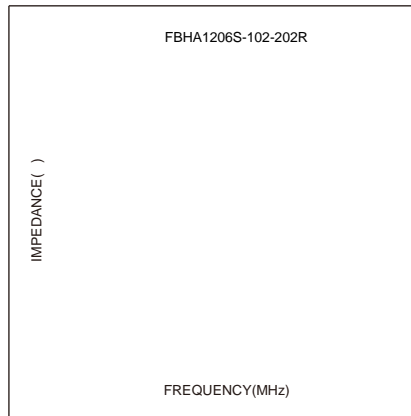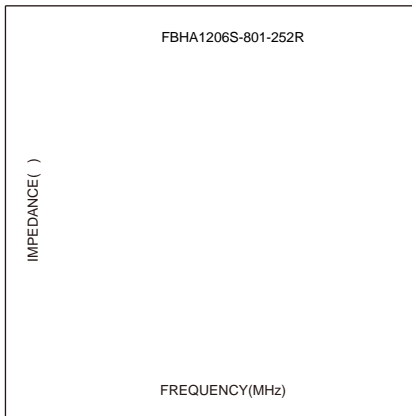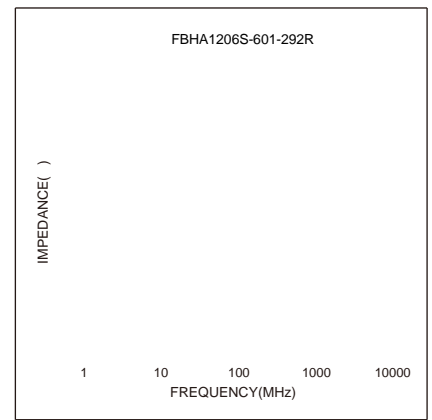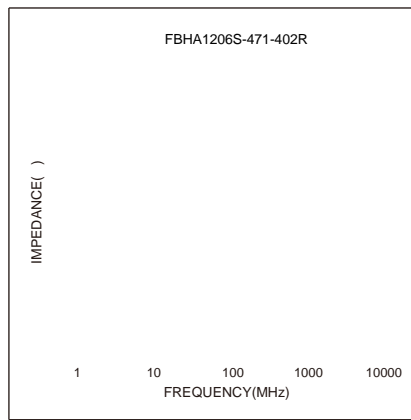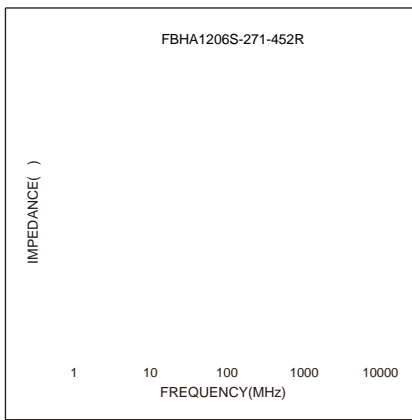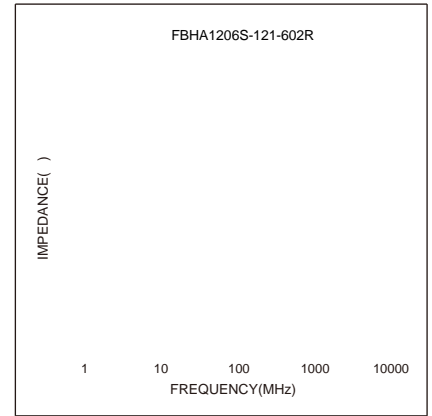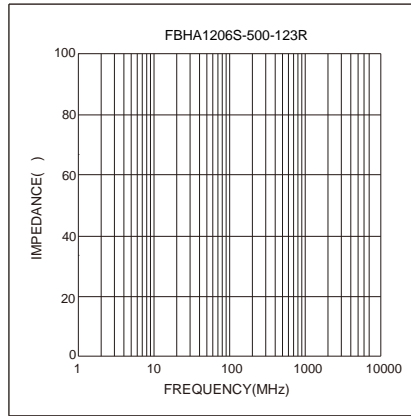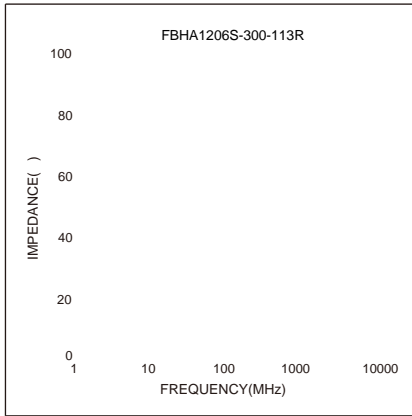


Soldering Reflow:

Packaging Information:

Tape Dimension :



Peel force of top cover tape:

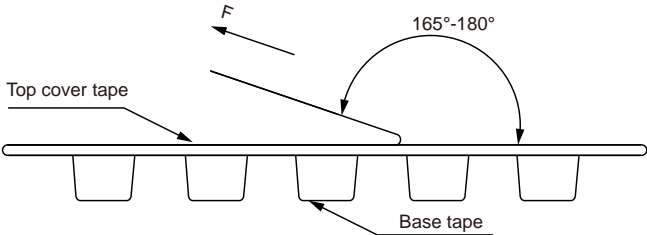

CAFK CA



Reel Dimension: [mm]

